





HTD 8M 皮帶規格(齒距 : 8.0mm)

表示方法 : 880 8M 30
 長度mm 規格 寬mm

皮帶齒型尺寸



齒輪齒型尺寸

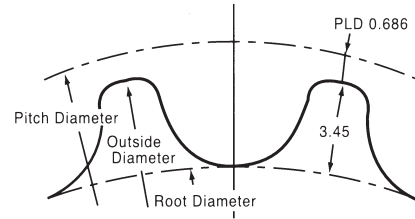

HTD 8M 皮帶長度

規格	長度(mm)	齒數	規格	長度(mm)	齒數	規格	長度(mm)	齒數	規格	長度(mm)	齒數
*264-8M	264	33	952-8M	952	119	*1512-8M	1512	189	2800-8M	2800	350
*320-8M	320	40	960-8M	960	120	1520-8M	1520	190	3048-8M	3048	381
368-8M	368	46	*968-8M	968	121	*1552-8M	1552	194	3200-8M	3200	400
*376-8M	376	47	*976-8M	976	122	1560-8M	1560	195	3280-8M	3280	410
*384-8M	384	48	1000-8M	1000	125	1576-8M	1576	197	3360-8M	3360	420
416-8M	416	52	1008-8M	1008	126	*1584-8M	1584	198	3600-8M	3600	450
424-8M	424	53	1016-8M	1016	127	1600-8M	1600	200	3824-8M	3824	478
440-8M	440	55	1040-8M	1040	130	1608-8M	1608	201	4200-8M	4200	525
472-8M	472	59	1048-8M	1048	131	1632-8M	1632	204	*4400-8M	4400	550
480-8M	480	60	1056-8M	1056	132	1640-8M	1640	205	*4960-8M	4960	620
*512-8M	512	64	*1064-8M	1064	133	1656-8M	1656	207			
*520-8M	520	65	1080-8M	1080	135	1680-8M	1680	210			
536-8M	536	67	1096-8M	1096	137	*1696-8M	1696	212			
544-8M	544	68	1104-8M	1104	138	*1728-8M	1728	216			
560-8M	560	70	1120-8M	1120	140	1760-8M	1760	220			
568-8M	568	71	*1128-8M	1128	141	1800-8M	1800	225			
*576-8M	576	72	1136-8M	1136	142	1824-8M	1824	228			
584-8M	584	73	1144-8M	1144	143	1840-8M	1840	230			
592-8M	592	74	1152-8M	1152	144	1888-8M	1888	236			
600-8M	600	75	*1160-8M	1160	145	*1896-8M	1896	237			
*608-8M	608	76	1168-8M	1168	146	1904-8M	1904	238			
616-8M	616	77	*1176-8M	1176	147	1936-8M	1936	242			
*624-8M	624	78	1184-8M	1184	148	1944-8M	1944	243			
632-8M	632	79	1192-8M	1192	149	1960-8M	1960	245			
640-8M	640	80	1200-8M	1200	150	2000-8M	2000	250			
*656-8M	656	82	1208-8M	1208	151	2032-8M	2032	254			
*672-8M	672	84	*1216-8M	1216	152	2048-8M	2048	256			
680-8M	680	85	*1224-8M	1224	153	2056-8M	2056	257			
696-8M	696	87	1232-8M	1232	154	*2080-8M	2080	260			
712-8M	712	89	1240-8M	1240	155	2104-8M	2104	263			
720-8M	720	90	1248-8M	1248	156	2120-8M	2120	265			
728-8M	728	91	*1256-8M	1256	157	2152-8M	2152	269			
760-8M	760	95	1264-8M	1264	158	2160-8M	2160	270			
*776-8M	776	97	1272-8M	1272	159	2184-8M	2184	273			
784-8M	784	98	1280-8M	1280	160	*2200-8M	2200	275			
792-8M	792	99	1304-8M	1304	163	2224-8M	2224	278			
800-8M	800	100	1312-8M	1312	164	2240-8M	2240	280			
824-8M	824	103	1320-8M	1320	165	2248-8M	2248	281			
840-8M	840	105	1328-8M	1328	166	2256-8M	2256	282			
848-8M	848	106	1344-8M	1344	168	2272-8M	2272	284			
856-8M	856	107	1352-8M	1352	169	2312-8M	2312	289			
864-8M	864	108	1360-8M	1360	170	2320-8M	2320	290			
872-8M	872	109	1392-8M	1392	174	2328-8M	2328	291			
880-8M	880	110	1400-8M	1400	175	2384-8M	2384	298			
888-8M	888	111	1408-8M	1408	176	2392-8M	2392	299			
896-8M	896	112	1424-8M	1424	178	2400-8M	2400	300			
*912-8M	912	114	*1432-8M	1432	179	2504-8M	2504	313			
920-8M	920	115	1440-8M	1440	180	2584-8M	2584	323			
928-8M	928	116	1456-8M	1456	182	2600-8M	2600	325			
*936-8M	936	117	1480-8M	1480	185	2688-8M	2688	336			

HTD 8M 標準皮帶寬

皮帶寬(mm)	20.0	25.0	30.0	40.0	50.0	60.0	70.0	85.0
皮帶寬代號	20	25	30	40	50	60	70	85

$$\text{齒輪節圓直徑 (PD)} = \frac{P \times N}{\pi}$$

$$\text{齒輪外徑 (OD)} = PD - 2 \times PLD$$

P : 皮帶齒距(mm) $\pi = 3.14159$

N : 皮帶齒輪齒數 8M · PLD : 0.686mm